


## RSA-TVA Air Velocity Transmitter

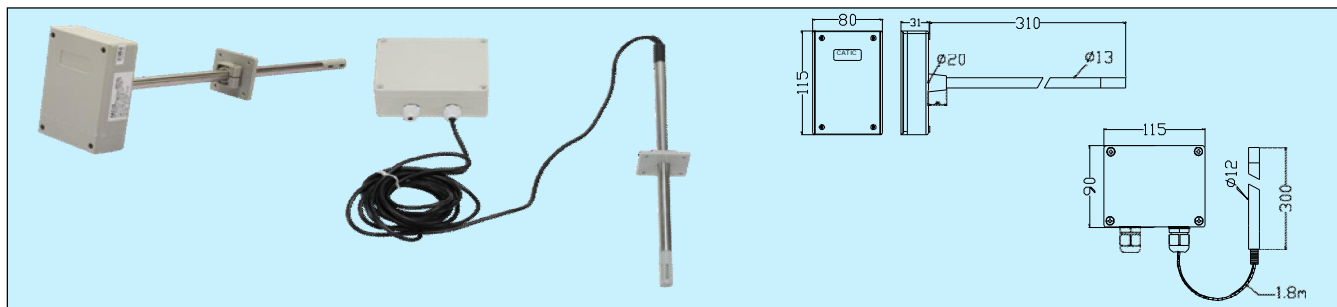

## Applications & Features

- It is designed for air velocity monitoring and controlling, can meet most HVAC applications
- Based on thermal anemometer principle, use innovative and sensitive hot-film sensor, which is insensitive to dust and dirt, easy to install and maintain
- No any moving parts, provide accurate, reliable, sensitive and long-term measurement, with wide range temperature compensation
- Digital technology applied to ensure output linearity and accuracy
- Over voltage and reverse polarity protection with high reliability and anti-interference capacity
- Multiple outputs available, optional relay for alarm or ON/OFF control
- 4 field jumper selectable ranges: 0~5/10/15/20 m/s
- Optional LCD& function keys, supports a variety of functions as parameters setting, modifying and calibrating, etc. See more details on LCD & Keys operation.

## Specifications

### Air velocity

**Sensor:** Hot-film sensor

**Range:** 0~5/10/15/20m/s or other (0~25m/s optional)

**Accuracy:**  $\leq \pm(0.4\text{m/s} + 3\% \text{ reading})$

@ 1~20m/s, 25°C, 55%RH, 1013hPa

**Response time:** 2 s

**Angle dependence:**  $< 3 \% \text{ reading} @ |\Delta\alpha| < 10^\circ$

**Temperature compensation:** 10~40°C

**Output:** 4~20mA(3 wires), 0~10VDC, RS485/Modbus

### Temperature

**Sensor:** Digital temperature sensor

**Range:** 0~50°C

**Accuracy:**  $\leq \pm 0.5^\circ\text{C} @ 0\sim 50^\circ\text{C}$

**Response time:** 10s

**Output:** 4~20mA(3 wires), 0~10VDC, RS485/Modbus

**Relay:** 1xSPDT, 1A/30VDC, 0.5A/125VAC

**Output Load:**  $\leq 500\Omega$ (current),  $\geq 2\text{k}\Omega$ (voltage)

**Power:** 16~28VAC/16~35VDC

**Working Temperature:** -20~85°C, 0~95%RH(Non cond.)

**Housing:** Fire proof ABS

**Protection:** IP65 **Approval:** CE

## Models

Model	RSA-TVA2	RSA-TVA4		Duct mount air velocity transmitter
				Remote mount air velocity transmitter
Output		1		4~20mA /0~10VDC
		B		4~20mA/0~10VDC&RS485/Modbus
Relay		0		N/A
		1		1xSPDT

All products are factory set to 4-20mA as output default, and can be set to 0-10V by jumper on the PCB.