

## Cable Temperature Sensor

Active sensor (0 to 5/10 V) for measuring the temperature in pipe and air applications. Incorporates a stainless steel probe and plenum rated cable.



## Type Overview

| Type     | Output Signal<br>Active<br>Temperature | Cable Length  | Probe Length | Probe Diameter |
|----------|--|---------------|--------------|----------------|
| 22CT-52H | DC 0...5 V,<br>DC 0...10 V             | 6.5 ft. [2 m] | 2" [50 mm]   | 0.24" [6 mm]   |

## Technical Data

| Electrical Data | Power Supply DC                      | 15...24 V, ±10%, 0.45 W  |                 |  |  |         |            |            |                 |    |               |                |  |    |                |              |  |    |             |               |  |    |              |               |  |    |               |              |  |    |              |               |  |    |               |              |  |    |              |              |
|-----------------|--------------------------------------|--|-----------------|--|--|---------|------------|------------|-----------------|----|---------------|----------------|--|----|----------------|--------------|--|----|-------------|---------------|--|----|--------------|---------------|--|----|---------------|--------------|--|----|--------------|---------------|--|----|---------------|--------------|--|----|--------------|--------------|
|                 | Power Supply AC                      | 24 V, ±10%, 0.8 VA   |                 |  |  |         |            |            |                 |    |               |                |  |    |                |              |  |    |             |               |  |    |              |               |  |    |               |              |  |    |              |               |  |    |               |              |  |    |              |              |
|                 | Electrical Connection                | removable spring loaded terminal block max. 11 GA [2.5 mm²]  |                 |  |  |         |            |            |                 |    |               |                |  |    |                |              |  |    |             |               |  |    |              |               |  |    |               |              |  |    |              |               |  |    |               |              |  |    |              |              |
|                 | Cable Entry                          | cable gland PG11 Ø6 to 10 mm, with strain relief Ø6 to 8 mm, 1/2" conduit adapter included   |                 |  |  |         |            |            |                 |    |               |                |  |    |                |              |  |    |             |               |  |    |              |               |  |    |               |              |  |    |              |               |  |    |               |              |  |    |              |              |
|                 | Cable Specification                  | 1 pair shielded plenum cable, 22AWG tinned copper, green jacket, -40°F to 300°F (-40°C to 150°C), 300 V  |                 |  |  |         |            |            |                 |    |               |                |  |    |                |              |  |    |             |               |  |    |              |               |  |    |               |              |  |    |              |               |  |    |               |              |  |    |              |              |
| Functional Data | Multirange                           | 8 fields selectable  |                 |  |  |         |            |            |                 |    |               |                |  |    |                |              |  |    |             |               |  |    |              |               |  |    |               |              |  |    |              |               |  |    |               |              |  |    |              |              |
|                 | Output Signal Active Note            | output DC 0 to 5/10 V with jumper adjustable voltage output: min. 5 kΩ load  |                 |  |  |         |            |            |                 |    |               |                |  |    |                |              |  |    |             |               |  |    |              |               |  |    |               |              |  |    |              |               |  |    |               |              |  |    |              |              |
|                 | Media                                | air<br>water   |                 |  |  |         |            |            |                 |    |               |                |  |    |                |              |  |    |             |               |  |    |              |               |  |    |               |              |  |    |              |               |  |    |               |              |  |    |              |              |
| Measuring Data  | Measured Values                      | temperature  |                 |  |  |         |            |            |                 |    |               |                |  |    |                |              |  |    |             |               |  |    |              |               |  |    |               |              |  |    |              |               |  |    |               |              |  |    |              |              |
|                 | Measuring Range Temperature Settings | Activ sensor: range selectable<br>Attention: max. measuring temperature is restricted by max. medium temperature (see Safety data)<br><table><tr><th>Setting</th><th>range [°C]</th><th>range [°F]</th><th>Factory setting</th></tr><tr><td>S0</td><td>-50°C to 50°C</td><td>-30°F to 130°F</td><td></td></tr><tr><td>S1</td><td>-10°C to 120°C</td><td>0°F to 250°F</td><td></td></tr><tr><td>S2</td><td>0°C to 50°C</td><td>40°F to 140°F</td><td></td></tr><tr><td>S3</td><td>0°C to 250°C</td><td>30°F to 480°F</td><td></td></tr><tr><td>S4</td><td>-15°C to 35°C</td><td>0°F to 100°F</td><td></td></tr><tr><td>S5</td><td>0°C to 100°C</td><td>40°F to 240°F</td><td></td></tr><tr><td>S6</td><td>-20°C to 80°C</td><td>40°F to 90°F</td><td></td></tr><tr><td>S7</td><td>0°C to 160°C</td><td>0°F to 150°F</td><td>✓</td></tr></table> |                 |  |  | Setting | range [°C] | range [°F] | Factory setting | S0 | -50°C to 50°C | -30°F to 130°F |  | S1 | -10°C to 120°C | 0°F to 250°F |  | S2 | 0°C to 50°C | 40°F to 140°F |  | S3 | 0°C to 250°C | 30°F to 480°F |  | S4 | -15°C to 35°C | 0°F to 100°F |  | S5 | 0°C to 100°C | 40°F to 240°F |  | S6 | -20°C to 80°C | 40°F to 90°F |  | S7 | 0°C to 160°C | 0°F to 150°F |
| Setting         | range [°C]                           | range [°F]   | Factory setting |  |  |         |            |            |                 |    |               |                |  |    |                |              |  |    |             |               |  |    |              |               |  |    |               |              |  |    |              |               |  |    |               |              |  |    |              |              |
| S0              | -50°C to 50°C                        | -30°F to 130°F   |                 |  |  |         |            |            |                 |    |               |                |  |    |                |              |  |    |             |               |  |    |              |               |  |    |               |              |  |    |              |               |  |    |               |              |  |    |              |              |
| S1              | -10°C to 120°C                       | 0°F to 250°F   |                 |  |  |         |            |            |                 |    |               |                |  |    |                |              |  |    |             |               |  |    |              |               |  |    |               |              |  |    |              |               |  |    |               |              |  |    |              |              |
| S2              | 0°C to 50°C                          | 40°F to 140°F  |                 |  |  |         |            |            |                 |    |               |                |  |    |                |              |  |    |             |               |  |    |              |               |  |    |               |              |  |    |              |               |  |    |               |              |  |    |              |              |
| S3              | 0°C to 250°C                         | 30°F to 480°F  |                 |  |  |         |            |            |                 |    |               |                |  |    |                |              |  |    |             |               |  |    |              |               |  |    |               |              |  |    |              |               |  |    |               |              |  |    |              |              |
| S4              | -15°C to 35°C                        | 0°F to 100°F   |                 |  |  |         |            |            |                 |    |               |                |  |    |                |              |  |    |             |               |  |    |              |               |  |    |               |              |  |    |              |               |  |    |               |              |  |    |              |              |
| S5              | 0°C to 100°C                         | 40°F to 240°F  |                 |  |  |         |            |            |                 |    |               |                |  |    |                |              |  |    |             |               |  |    |              |               |  |    |               |              |  |    |              |               |  |    |               |              |  |    |              |              |
| S6              | -20°C to 80°C                        | 40°F to 90°F   |                 |  |  |         |            |            |                 |    |               |                |  |    |                |              |  |    |             |               |  |    |              |               |  |    |               |              |  |    |              |               |  |    |               |              |  |    |              |              |
| S7              | 0°C to 160°C                         | 0°F to 150°F   | ✓               |  |  |         |            |            |                 |    |               |                |  |    |                |              |  |    |             |               |  |    |              |               |  |    |               |              |  |    |              |               |  |    |               |              |  |    |              |              |
| Materials       | Accuracy Temperature                 | ±1% of measuring range @ 70°F [21°C], with cable max. 6.6 ft 2 m   |                 |  |  |         |            |            |                 |    |               |                |  |    |                |              |  |    |             |               |  |    |              |               |  |    |               |              |  |    |              |               |  |    |               |              |  |    |              |              |
|                 | Cable Gland                          | PA6, black   |                 |  |  |         |            |            |                 |    |               |                |  |    |                |              |  |    |             |               |  |    |              |               |  |    |               |              |  |    |              |               |  |    |               |              |  |    |              |              |
|                 | Mounting Plate                       | lexan, silvergray RAL7001  |                 |  |  |         |            |            |                 |    |               |                |  |    |                |              |  |    |             |               |  |    |              |               |  |    |               |              |  |    |              |               |  |    |               |              |  |    |              |              |
|                 | Housing                              | cover: lexan, Belimo orange NCS S0580-Y6OR<br>base: lexan, Belimo orange NCS S0580-Y6OR<br>seal: 0467 NBR70, black   |                 |  |  |         |            |            |                 |    |               |                |  |    |                |              |  |    |             |               |  |    |              |               |  |    |               |              |  |    |              |               |  |    |               |              |  |    |              |              |

**Safety Data**

|                                     |   |
|-------------------------------------|---|
| Ambient Humidity                    | 85% RH non-condensing                   |
| Ambient Temperature                 | -30°F to 120°F [-35°C to 50°C]          |
| Medium Temperature                  | -60°F to 245°F [-50°C to 120°C]         |
| Housing Surface Temperature (Tsurf) | max. 160°F [70°C]                       |
| Protection Class IEC/EN             | III protective extra-low voltage (pelv) |
| Protection Class UL                 | UL Class 2 Supply                       |
| EU Conformity                       | CE Marking                              |
| Certification IEC/EN                | IEC/EN 60730-1 and IEC/EN 60730-2-9     |
| Certification UL                    | pending                                 |
| Degree of Protection IEC/EN         | IP65                                    |
| Degree of Protection NEMA/ UL       | NEMA 4X                                 |
| Quality Standard                    | ISO 9001                                |
| Weight                              | 0.16 lbs                                |

**Safety Notes**


The installation and assembly of electrical equipment should only be performed by authorized personnel.

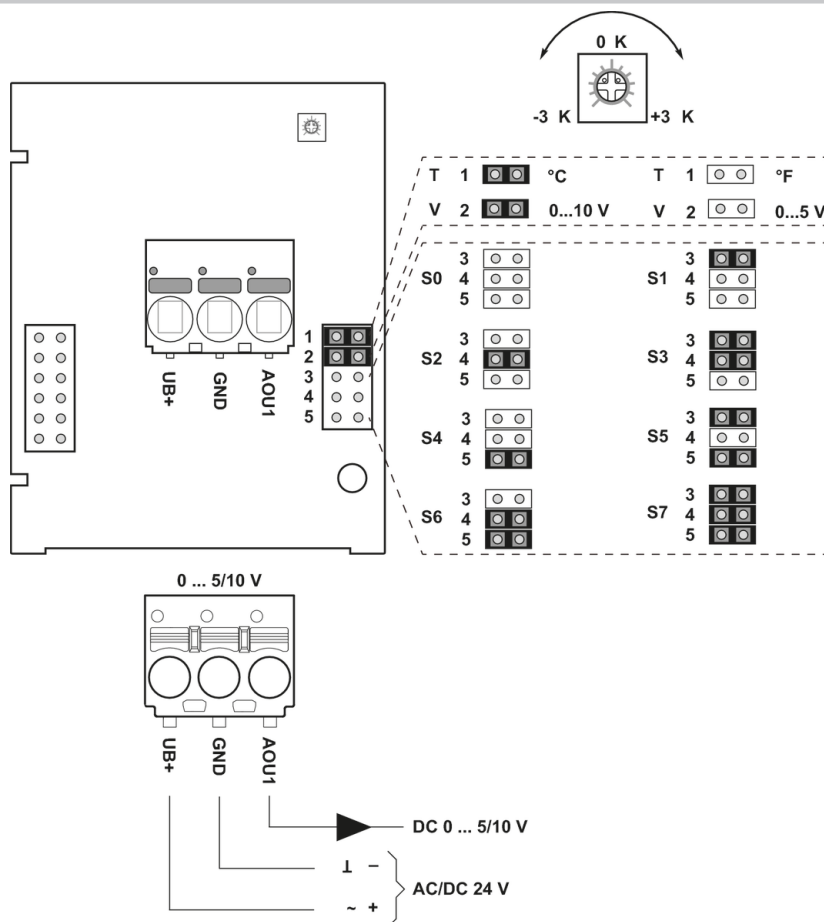
The product should only be used for the intended application. Unauthorized modifications are prohibited! The product must not be used in relation with any equipment that in case of a failure may threaten, directly or indirectly, human health or life or result in danger to human beings, animals or assets. Ensure all power is disconnected before installing. Do not connect to live/operating equipment.

Please comply with

- Local laws, health & safety regulations, technical standards and regulations
- Condition of the device at the time of installation, to ensure safe installation
- This data sheet and installation manual

## Accessories

|  |                                      |   |             |
|--|--------------------------------------|---|-------------|
|  | <b>Scope of Delivery</b>             | mounting plate<br>dowel<br>screws<br>cable gland nut conduit 1/2" NPT                             |             |
|  |                                      |   |             |
|  | <b>Optional accessories air</b>      | <b>Description</b>  | <b>Type</b> |
|  |                                      | mounting flange 0.24" [6 mm], plastic (adjustable), up to max. 248°F [120°C]                      | A-22D-A03   |
|  | <b>Recommended accessories water</b> | mounting flange mounting flange brass, up to max. 500°F [260°C]                                   | A-22D-A05   |
|  |                                      | <b>Description</b>  | <b>Type</b> |
|  |                                      | thermowell pocket stainless steel (fabricated), 2" [50 mm], 1/2" NPT, wrench size 3/4"            | A-22P-A05   |
|  |                                      | thermowell pocket brass (fabricated), 2" [50 mm], 1/2" NPT, wrench size 3/4"                      | A-22P-A17   |
|  |                                      | thermowell pocket stainless steel (machined), 2" [50 mm], 1/2" NPT, wrench size 3/4"              | A-22P-A36   |
|  |                                      | thermowell pocket stainless steel (fabricated), 4" [100 mm], 1/2" NPT, wrench size 3/4"           | A-22P-A07   |
|  |                                      | thermowell pocket brass (fabricated), 4" [100 mm], 1/2" NPT, wrench size 3/4"                     | A-22P-A19   |
|  |                                      | thermowell pocket stainless steel (machined), 4" [100 mm], 1/2" NPT, wrench size 3/4"             | A-22P-A37   |
|  |                                      | thermowell pocket stainless steel (fabricated), 6" [150 mm], 1/2" NPT, wrench size 3/4"           | A-22P-A09   |
|  |                                      | thermowell pocket brass (fabricated), 6" [150 mm], 1/2" NPT, wrench size 3/4"                     | A-22P-A21   |
|  |                                      | thermowell pocket stainless steel (machined), 6" [150 mm], 1/2" NPT, wrench size 3/4"             | A-22P-A38   |
|  |                                      | thermowell pocket stainless steel (fabricated), 8" [200 mm], 1/2" NPT, wrench size 3/4"           | A-22P-A11   |
|  |                                      | thermowell pocket brass (fabricated), 8" [200 mm], 1/2" NPT, wrench size 3/4"                     | A-22P-A23   |
|  |                                      | thermowell pocket stainless steel (machined), 8" [200 mm], 1/2" NPT, wrench size 3/4"             | A-22P-A39   |
|  |                                      | thermowell pocket stainless steel (fabricated), 12" [300 mm], 1/2" NPT, wrench size 3/4"          | A-22P-A13   |
|  |                                      | thermowell pocket brass (fabricated), 12" [300 mm], 1/2" NPT, wrench size 3/4"                    | A-22P-A25   |
|  |                                      | thermowell pocket stainless steel (fabricated), 18" [450 mm], 1/2" NPT, wrench size 3/4"          | A-22P-A15   |
|  |                                      | thermowell pocket brass (fabricated), 18" [450 mm], 1/2" NPT, wrench size 3/4"                    | A-22P-A27   |
|  |                                      | syringe thermal contact fluid   | A-22P-A44   |
|  |                                      | Compression fitting with cutting ring, stainless steel, G 1/4" (external thread) for 0.24" [6 mm] | A-22P-A45   |

**Wiring Diagram**


the adjustment of the measuring ranges is made by changing the bonding jumpers  
the output value in the new measuring range is available after 2 seconds

| Setting | range [°C]     | range [°F]     | Factory setting |
|---------|----------------|----------------|-----------------|
| S0      | -50°C to 50°C  | -30°F to 130°F |                 |
| S1      | -10°C to 120°C | 0°F to 250°F   |                 |
| S2      | 0°C to 50°C    | 40°F to 140°F  |                 |
| S3      | 0°C to 250°C   | 30°F to 480°F  |                 |
| S4      | -15°C to 35°C  | 0°F to 100°F   |                 |
| S5      | 0°C to 100°C   | 40°F to 240°F  |                 |
| S6      | -20°C to 80°C  | 40°F to 90°F   |                 |
| S7      | 0°C to 160°C   | 0°F to 150°F   | ✓               |

**Dimensions**
