

Duct / Immersion Temperature Sensor

Active sensor (0 to 5/10 V) for measuring temperature in duct applications. Can also be used in combination with a stainless steel or brass thermowell which is also applicable for pipe applications. NEMA 4X / IP65 rated enclosure.



Type Overview

Type	Output Signal Active Temperature	Probe Length	Probe Diameter
22DT-52H	DC 0...5 V, DC 0...10 V	2" [50 mm]	0.24" [6 mm]
22DT-52L	DC 0...5 V, DC 0...10 V	4" [100 mm]	0.24" [6 mm]
22DT-52N	DC 0...5 V, DC 0...10 V	6" [150 mm]	0.24" [6 mm]
22DT-52P	DC 0...5 V, DC 0...10 V	8" [200 mm]	0.24" [6 mm]
22DT-52R	DC 0...5 V, DC 0...10 V	12" [300 mm]	0.24" [6 mm]
22DT-52T	DC 0...5 V, DC 0...10 V	18" [450 mm]	0.24" [6 mm]

Technical Data

Electrical Data	Power Supply DC	15...24 V, ±10%, 0.35 W
	Power Supply AC	24 V, ±10%, 0.82 VA
	Electrical Connection	removable spring loaded terminal block max. 11 GA [2.5 mm ²]
	Cable Entry	cable gland PG11 Ø6 to 10 mm, with strain relief Ø6 to 8 mm, 1/2" conduit adapter included
Functional Data	Multirange	8 fields selectable
	Output Signal Active Note	output DC 0 to 5/10 V with jumper adjustable voltage output: min. 5 kΩ load
	Media	air water
Measuring Data	Measured Values	temperature
	Measuring Range Temperature Settings	Activ sensor: range selectable Attention: max. measuring temperature is restricted by max. medium temperature (see Safety data) Setting range [°C] range [°F] Factory setting S0 -50°C to 50°C -30°F to 130°F S1 -10°C to 120°C 0°F to 250°F S2 0°C to 50°C 40°F to 140°F S3 0°C to 250°C 30°F to 480°F S4 -15°C to 35°C 0°F to 100°F S5 0°C to 100°C 40°F to 240°F S6 -20°C to 80°C 40°F to 90°F S7 0°C to 160°C 0°F to 150°F ✓
Accuracy Temperature		±1% of measuring range @ 70°F [21°C]

Materials	Cable Gland	PA6, black
	Housing	cover: lexan, Belimo orange NCS S0580-Y6OR base: lexan, Belimo orange NCS S0580-Y6OR seal: 0467 NBR70, black
Safety Data	Ambient Humidity	85% RH non-condensing
	Ambient Temperature	-30°F to 120°F [-35°C to 50°C]
	Medium Temperature	-60°F to 320°F [-50°C to 160°C]
	Housing Surface Temperature (Tsurf)	max. 160°F [70°C]
	Protection Class IEC/EN	III protective extra-low voltage (pelv)
	Protection Class UL	UL Class 2 Supply
	EU Conformity	CE Marking
	Certification IEC/EN	IEC/EN 60730-1 and IEC/EN 60730-2-9
	Certification UL	pending
	Degree of Protection IEC/EN	IP65
	Degree of Protection NEMA/ UL	NEMA 4X
	Quality Standard	ISO 9001
	Weight	0.10 lbs

Safety Notes


The installation and assembly of electrical equipment should only be performed by authorized personnel.

The product should only be used for the intended application. Unauthorized modifications are prohibited! The product must not be used in relation with any equipment that in case of a failure may threaten, directly or indirectly, human health or life or result in danger to human beings, animals or assets. Ensure all power is disconnected before installing. Do not connect to live/operating equipment.


Please comply with

- Local laws, health & safety regulations, technical standards and regulations
- Condition of the device at the time of installation, to ensure safe installation
- This data sheet and installation manual

Accessories

	Scope of Delivery	mounting clip screws adhesive foil cable gland nut conduit 1/2" NPT	
	Optional accessories air	Description	Type
		mounting flange 0.24" [6 mm], plastic (adjustable), up to max. 248°F [120°C]	A-22D-A03
		mounting flange mounting flange brass, up to max. 500°F [260°C]	A-22D-A05
	Recommended accessories water	Description	Type
		thermowell pocket stainless steel (fabricated), 2" [50 mm], 1/2" NPT, wrench size 3/4"	A-22P-A05
		thermowell pocket brass (fabricated), 2" [50 mm], 1/2" NPT, wrench size 3/4"	A-22P-A17
		thermowell pocket stainless steel (machined), 2" [50 mm], 1/2" NPT, wrench size 3/4"	A-22P-A36
		thermowell pocket stainless steel (fabricated), 4" [100 mm], 1/2" NPT, wrench size 3/4"	A-22P-A07
		thermowell pocket brass (fabricated), 4" [100 mm], 1/2" NPT, wrench size 3/4"	A-22P-A19
		thermowell pocket stainless steel (machined), 4" [100 mm], 1/2" NPT, wrench size 3/4"	A-22P-A37
		thermowell pocket stainless steel (fabricated), 6" [150 mm], 1/2" NPT, wrench size 3/4"	A-22P-A09
		thermowell pocket brass (fabricated), 6" [150 mm], 1/2" NPT, wrench size 3/4"	A-22P-A21
		thermowell pocket stainless steel (machined), 6" [150 mm], 1/2" NPT, wrench size 3/4"	A-22P-A38
		thermowell pocket stainless steel (fabricated), 8" [200 mm], 1/2" NPT, wrench size 3/4"	A-22P-A11
		thermowell pocket brass (fabricated), 8" [200 mm], 1/2" NPT, wrench size 3/4"	A-22P-A23
		thermowell pocket stainless steel (machined), 8" [200 mm], 1/2" NPT, wrench size 3/4"	A-22P-A39
		thermowell pocket stainless steel (fabricated), 12" [300 mm], 1/2" NPT, wrench size 3/4"	A-22P-A13
		thermowell pocket brass (fabricated), 12" [300 mm], 1/2" NPT, wrench size 3/4"	A-22P-A25
		thermowell pocket stainless steel (fabricated), 18" [450 mm], 1/2" NPT, wrench size 3/4"	A-22P-A15
		thermowell pocket brass (fabricated), 18" [450 mm], 1/2" NPT, wrench size 3/4"	A-22P-A27
		syringe thermal contact fluid	A-22P-A44
		Compression fitting with cutting ring, stainless steel, G 1/4" (external thread) for 0.24" [6 mm]	A-22P-A45

Wiring Diagram

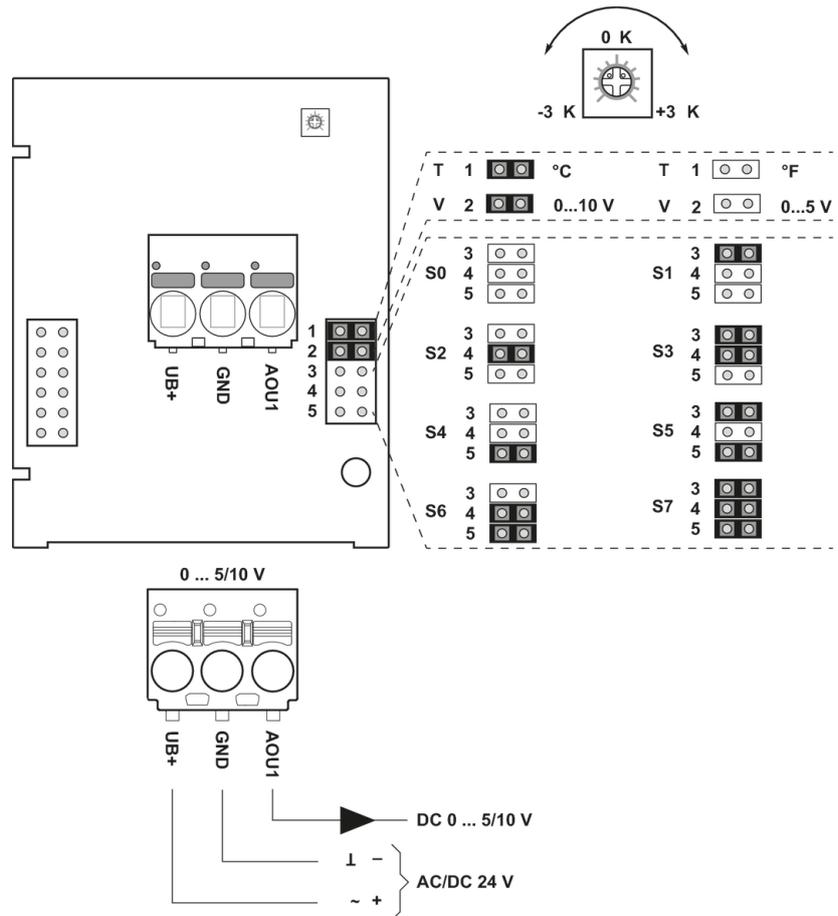

the adjustment of the measuring ranges is made by changing the bonding jumpers
 the output value in the new measuring range is available after 2 seconds

Setting	range [°C]	range [°F]	Factory setting
S0	-50°C to 50°C	-30°F to 130°F	
S1	-10°C to 120°C	0°F to 250°F	
S2	0°C to 50°C	40°F to 140°F	
S3	0°C to 250°C	30°F to 480°F	
S4	-15°C to 35°C	0°F to 100°F	
S5	0°C to 100°C	40°F to 240°F	
S6	-20°C to 80°C	40°F to 90°F	
S7	0°C to 160°C	0°F to 150°F	✓

Dimensions

